


DESIGN FACT SHEET


SURFACE

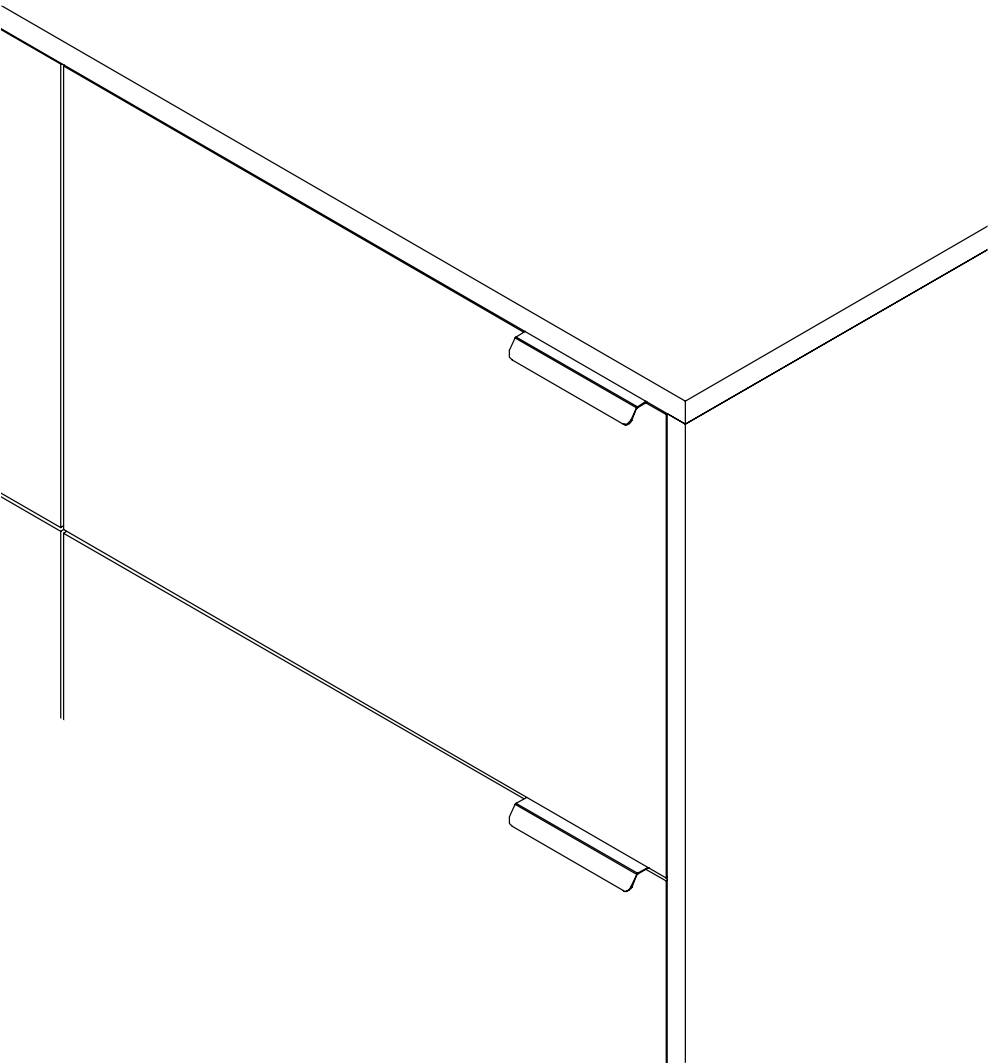


INTRO

SURFACE was designed with a furniture-maker's approach, in a rigorous process that strips the classic kitchen of every unnecessary ornament. What is left is built to last.


It uses a range of materials that let the kitchen change and patinate as you live with it — a design made timeless by its human-centred, accommodating functionality rather than by any styling.

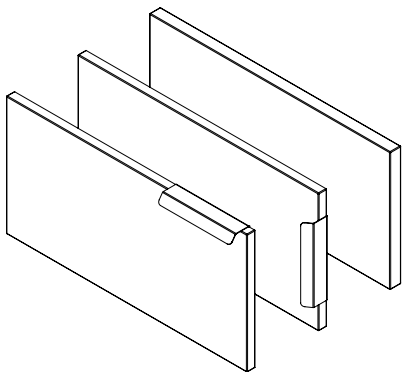


Doors

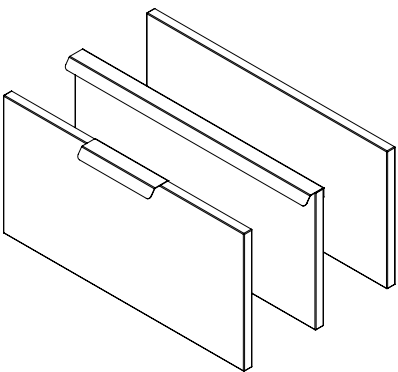


Drawers

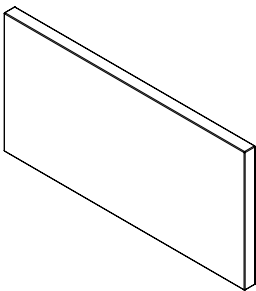

Cover panels

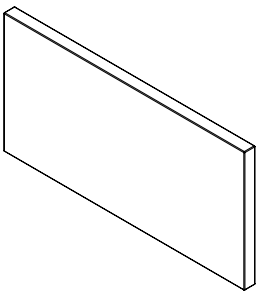

Inserts

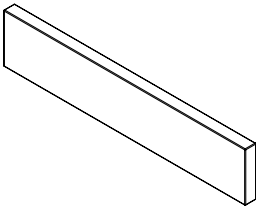

Plinths

The SURFACE design comes in two variants of sawn-cut veneered oak: natural sawn-cut oak or smoked sawn-cut oak. The sawn-cut surface gives the fronts a textural and tactile look and feel.


The design is conceived as a push-to-open solution. However, handles are recommended for any built-in appliances. The handle is available in brass, burnished copper, black coated steel or stainless steel either in the length of 12 cm / 4 23/32" or in a length that fits the width of the front. Choosing handles for all fronts is also an option.



OAK – Natural



OAK – Smoked

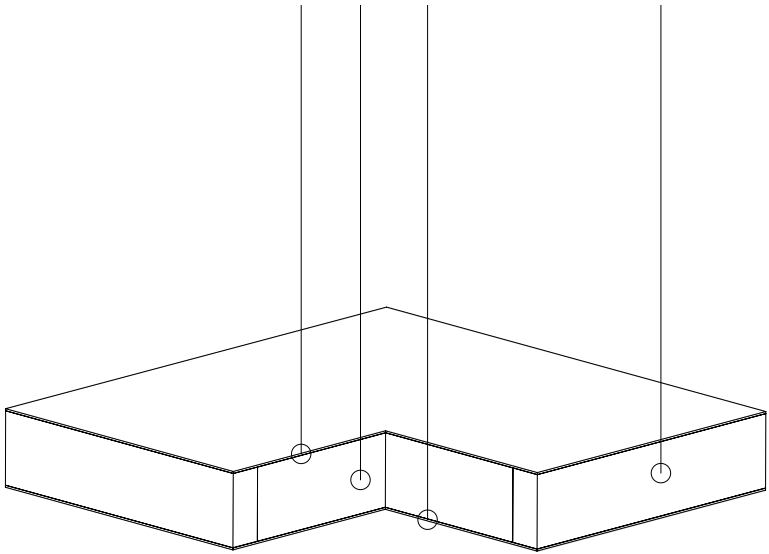

Doors, Drawers and Blinds

Total thickness 19 mm / 3/4"

Corners and edges Radius 1 mm / 1/32"

Grain direction Vertical

Surface treatment Beeswax

- | | |
|--------------|---|
| A – Front | 0.5 mm / 1/32" sawn-cut veneered European oak |
| B – Core | 18 mm / 23/32" standard MDF |
| C – Back | 0.5 mm / 1/32" sawn-cut veneered European oak |
| D – Edgeband | 8 mm / 11/32" solid European oak |

Please note that measurements may vary according to material tolerances


Cover Panels, Inserts and Plinths

Cover panels, inserts and plinths are designed to match the fronts with a surface of sawn-cut oak on a core of chipboard.

Care and maintenance

The fronts in sawn-cut veneered oak can be cleaned by wiping a soft, lint-free cloth doused in lukewarm water in the direction of the grain. In addition, a biannual treatment with either natural or dark beeswax is recommended.



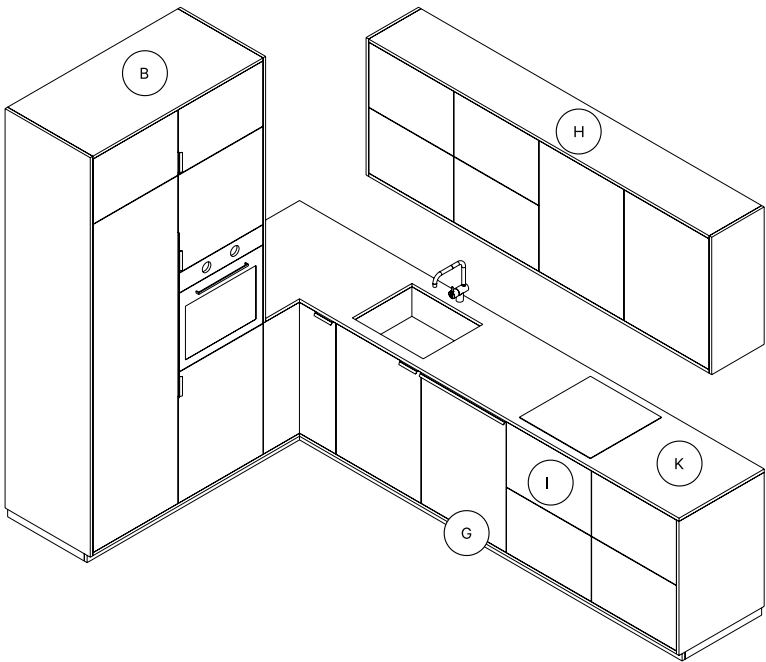

Design recommendations

Norm Architects recommend adding a cover panel beneath the base cabinets (G) just above the plinth to create the illusion of a frame around the fronts. Furthermore, the designer recommends adding cover panels above (H) and below the wall cabinets as well as above the high cabinets (B) to create a framed look throughout the kitchen.

The SURFACE design is completed with cabinets in either a black or natural oak finish to match the fronts. We recommend wooden drawers in either natural or smoked oak for a coordinated tone-on-tone look. However, a contrasting and vibrant look can be created by pairing up elements of natural and smoked oak on the inside of the cabinets.

Countertop recommendations

Norm Architects recommend a 20 mm / 25/32" countertop (K) in solid oak.

Handles


The design is conceived as a push-to-open solution. However, handles are recommended for any built-in appliances. Choosing handles for all fronts is also an option.

The SURFACE handle (I) comes in either a fixed length of 12 cm / 4 23/32" or in a length that fits the width of the front. All handles come in the variants brass, burnished copper, black coated steel, or stainless steel.

The handles are purchased separately and mounted externally during installation on the chamfered edge of the fronts. You can choose the position of the handle yourself—It can be mounted either vertically or horizontally.

Handle specifications


Variants	Brass
	Stainless Steel
	Metal (Burnished copper)
	Black (Powder coated stainless steel)
Dimensions	120 mm, 400 mm, 450 mm, 600 mm, 800 mm / 4 23/32", 15", 18", 24", 30", 36"

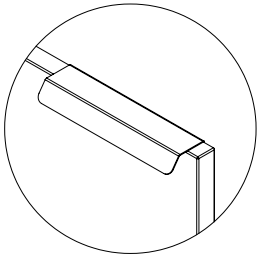

Oak



Natural

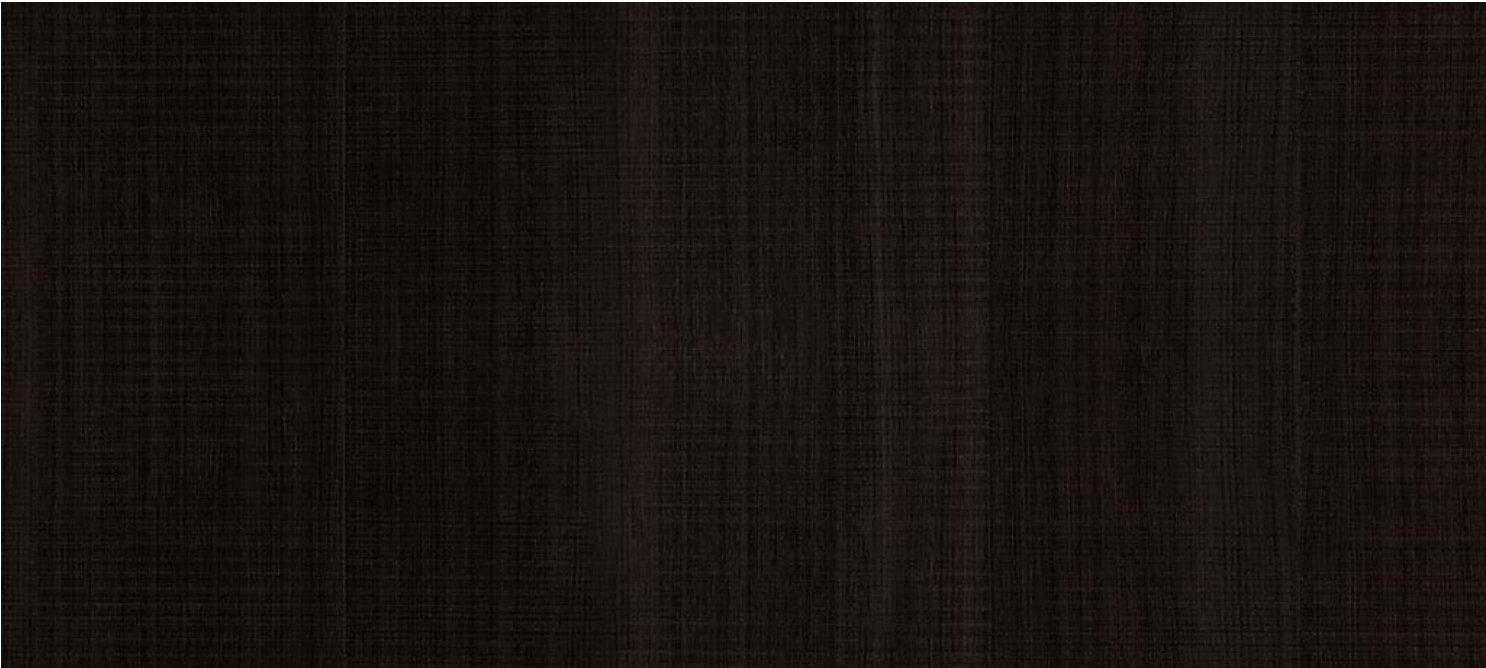

Smoked